


Section _____ Town _____ Range _____

18

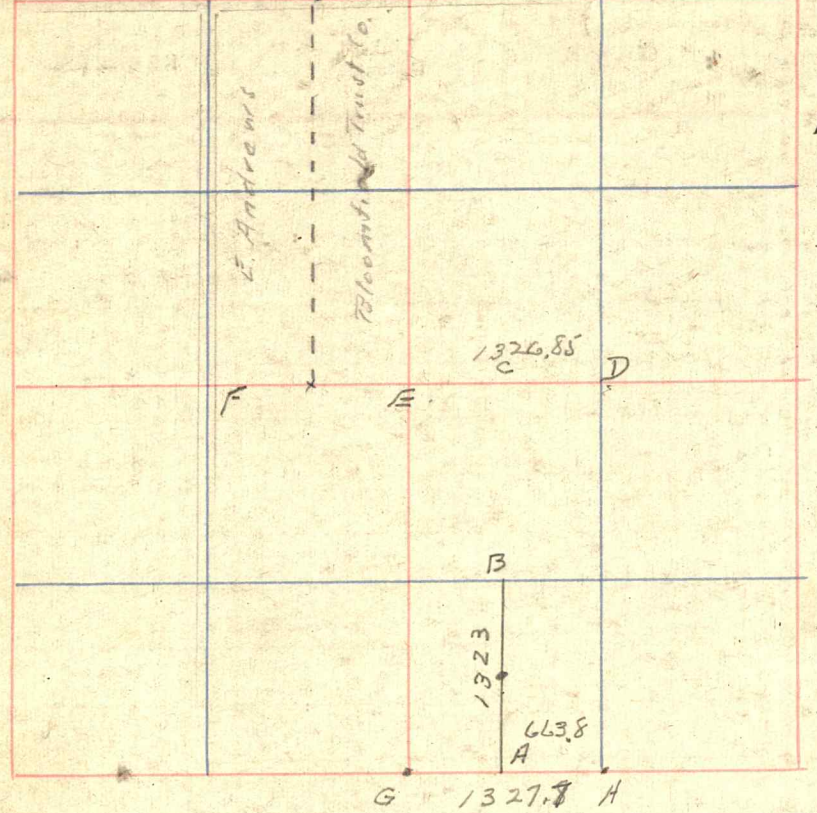

I commenced a Survey of Section 14, T. 7, R. 18
for purpose of straightening line between
E. Andrews & Bleeders Trust Co.

C. B.

Henry J. Schlot
Surveyor Greene County.

Var.

CORNER ESTABLISHED.	Monument.	Device.	WITNESS POINTS OR BEARING TREES.	Mark or Dia. in Inches.	COURSE.	Links Distant.	REMARKS.
---------------------	-----------	---------	--	-------------------------------	---------	-------------------	----------

Re est. 1	Stone		T. Pole 4 1/8" W 1/2 E	36.4"			New Witness
Re NENW	Stone		Parkers Beach	30"	N 37 1/2 E	32.9#	
			4 Drim tile Gravel in		N 31 27' E	37.4#	

Course.	Point of Beginning.	Chains Distance.	Corrected Bearings.
---------	------------------------	---------------------	------------------------

East	N 1/4 NW	1361.8 ft to N 1/4	
	S 1/4 NW	2694 ft to S 1/4 NE	

} Stones in place.

May 1 1926 in section 14-7-7
H. G. Schlot by W. W. Clogston

SW 1/4 14-7-7	Linton Corporation Corner	N 1/4 E	79 1/2
N 1/4 SW 1/4	Southwest Corner School House	N 73 E	41
	S E " Green house	N 29 W	54

Sec 19-7-5
Survey for Dora Klingner - Hallic Miller
See plat above
Run Line A-B. Corners D-F-C-H to B-Found

Re est.	SW	Iron Pin	Clogstons B. Oak	36"	N 55 1/2 E	26 ft.	These Corn. located
			W. Oak	20"	S 42 E	54.6 ft.	since 21. 1926 when
	NW	Stone here	Column of bricks		East	25 ft.	running Co. line for

bridges.

New Wit.	S 1/4	Stone	W oak	40"	North	87 ft.	
	S 1/4 NW	"	SW cor Stone to Church		N - E	135'-8"	
			Nail in Tot poles	67.8'	36.4'	3" S. Oak	
				87.4'			
A		3/8 Bolt 14" Long	Nail in W Oak	10"	N 25 W	25'-4"	
			" " Tot Pole	10"	S 58 W	36'-1"	
B		Stone	" " B. Oak	40"	S 57 40 W	33'-11"	
			B "	36"	N 18 45 W	55'-5"	